

# THE LS420 **Wireless Multi-Sensor Indicator** **Monitor Load/Angle/Radius/A2B/Wind Speed**



Monitor ANY combination of Wireless Load, Angle, Hook Radius, A2B & Wind Speed from a single LS420 Display




Stainless Steel Load Cell



Optional Wind Speed Sensor

- Eliminate the guess work of what the load your lifting actually weighs
- Temperature compensation of the load cell ensures high level of accuracy
- Load cell will quickly install on the ball, block or boom tip dead end
- Exceptional display visibility in direct sunlight

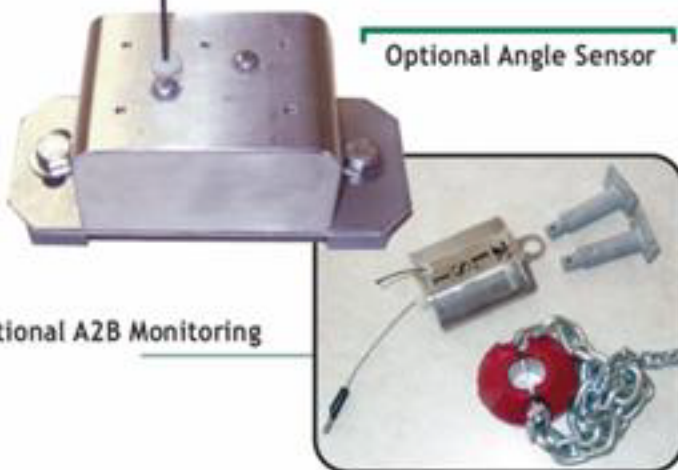

Optional A2B Monitoring

Optional Angle Sensor

*The LS420 ships pre-calibrated and installs in less than 45 minutes*

Boom sensors use 3 "C" cell alkaline batteries. Replacement batteries cost less than \$5.00



Distributed by Innovative Crane Technologies

www.craneloadindicator.com  
**Harry McCaskill**  
 Office: 251-645-6555  
 Cell: 251-680-2051  
 E-Mail: harrym@direcway.com

CSA approved as  
 Intrinsically Safe/Class 1 Div 2  
 CSA Approval Number 215780